



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :

D21C 3/24, 7/06

A1

(11) International Publication Number:

WO 98/59107

(43) International Publication Date: 30 December 1998 (30.12.98)

(21) International Application Number: PCT/SE97/01135

(22) International Filing Date: 25 June 1997 (25.06.97)

(71) Applicant (for all designated States except US): KVAERNER PULPING AB [SE/SE]; P.O. Box 1033, S-651 15 Karlstad (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): GUSTAVSSON, Lennart [SE/SE]; Renvallsvägen 38, S-653 50 Karlstad (SE). SNEKKENES, Vidar [NO/SE]; Herrhagsgatan 62, S-652 19 Karlstad (SE).

(74) Agent: BJÖRKMAN, Annika; Kvaerner Pulping AB, P.O. Box 1033, S-651 15 Karlstad (SE).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

With amended claims.

(54) Title: METHOD IN CONNECTION WITH THE PRETREATMENT OF COMMINUTED FIBROUS MATERIAL

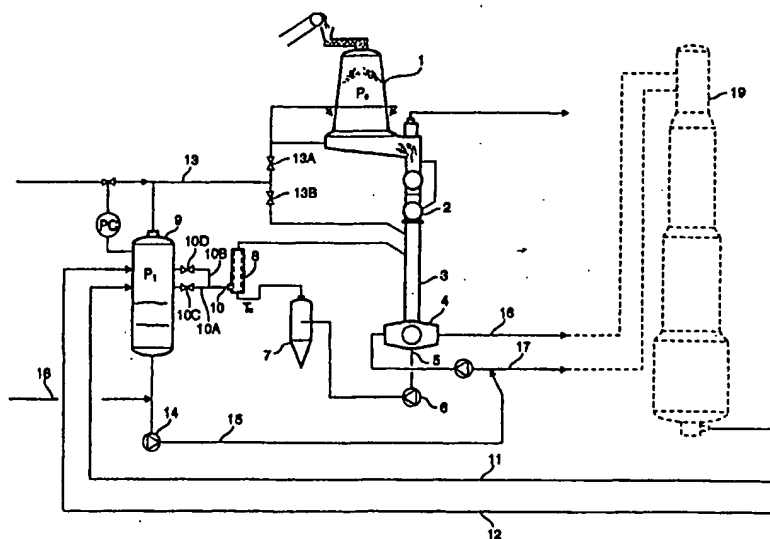

(57) Abstract

A method in connection with the pretreatment of comminuted fibrous material intended for chemical cellulose pulp production, wherein said comminuted fibrous material is fed through a low pressure system comprising a gas phase part followed by a liquid phase part, said liquid phase part including a low pressure circulation where a circulating liquid is withdrawn from said fibrous material and is recirculated back to said fibrous material in an upstream position, said fibrous material is sluiced (4) into a high pressure system comprising a liquid phase transfer part operatively connected to a digester (19). Hot process liquid (11, 12) and/or said circulating liquid (10) is evaporatively cooled by being allowed to flash within said low pressure system.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Title: Method in connection with the pretreatment of
comminuted fibrous material

DESCRIPTION

5

Technical field:

The present invention relates to a method in connection with the pretreatment, that is steaming and impregnation, of comminuted fibrous material that is
10 intended for use in cellulose production by chemical methods, for example kraft cellulose production.

State of the art and problems:

In the production of cellulose pulp from
15 comminuted fibrous material, preferably wood chips, by chemical methods, for example kraft cooking, there is a need to pretreat the material before the cooking in order to drive out gas and vapour from the cavities inside the wood chips and replace it with a liquid at the same time
20 as the chips are heated.

Conventional pretreatment processes normally include a chip bin from which the chips are fed via a low pressure feeder to low pressure system which comprises a steaming vessel followed by a chip chute. At the lower
25 end of the chip chute there is optionally arranged a pump and thereafter a pressure sluice, a so called high pressure feeder, by aid of which the chips are introduced into a high pressure system. From the high pressure feeder there is also an outgoing line that establishes a
30 liquid phase low pressure circulation together with a pump, a sand trap, a tubular strainer and a level tank. By this low pressure circulation, circulating liquid is transferred back to the fibrous material in an upstream position. The high pressure system includes a transfer
35 circulation that transfers the chips, together with

liquor, to the top of a digester or an impregnation vessel. A part of the liquor is separated from the chips at the top of the digester and transferred back to the high pressure feeder. The chips are cooked in the
5 digester in an upper concurrent zone followed by a lower countercurrent zone. An extraction screen section is arranged between these zones. Hot black liquor is extracted from this screen section and led to a flash tank, which is usually coupled in series with a second
10 flash tank. The steam phase from the flash tanks is usually used as a direct heat source in said chip bin and/or steaming vessel. There is a need to cool (by means of cold white liquor or separate cooling with cold water) the liquor in the return line of the transfer circulation
15 and/or the circulating liquid in the low pressure circulation in order to avoid flashing and resulting bangs in the high pressure feeder.

From US 5,053,108 there is known a process where black liquor is led to the chip chute. This black liquor
20 originates from the flash tanks and has hence been cooled through the pressure release in the flash tanks.

In a conventional system there is a potential to enhance the heat economy to an extent which has not been fully done in the past.

25

Solutions and advantages:

The object of the present invention is to provide an improved method in connection with the pretreatment of comminuted fibrous material, which method provides a way
30 to avoid bangs in the high pressure feeder and also gives better heat economy and less equipment than conventional methods.

This is achieved by the method according to patent claim 1, which means that hot process liquid
35 and/or circulating liquid in the low pressure circulation

is evaporatively cooled by being allowed to flash within said low pressure system. Said hot process liquid is preferably uncooled before its entry into the low pressure system. The pressure of said hot process liquid
5 is preferably essentially the same as in the high pressure system.

Normally, said low pressure system includes a low pressure circulation where liquid is withdrawn from said fibrous material and is recirculated back to said fibrous
10 material in an upstream position. The conventional low pressure circulation comprises a level tank for pressure balancing against a gas phase part of the low pressure system, so that a liquor level (normally in the chip chute) between said gas phase part and said liquid phase
15 part can be controlled and a liquid flow from said low pressure circulation can be stabilised. Said level tank is in the following included in the low pressure system and in the low pressure circulation, although the liquid which is formed in the bottom of the tank is normally
20 withdrawn from the circulation and also although the saturation pressure at the temperature in the level tank may be lower than in the rest of the low pressure system. According to a further aspect of the invention said hot process liquid and/or said circulating liquid is allowed
25 to flash into said level tank.

A further aspect of the invention is that steam is produced by said flashing and that this steam is used for direct heating of said fibrous material.

A further aspect of the invention is that said
30 hot process liquid comprises black liquor.

Yet a further aspect of the invention is that said hot process liquid has a temperature of 100-180°C, preferably 110-170°C and more preferably 120-160°C and a pressure of 3 - 25 bar, preferably 4 - 20 bar and more
35 preferably 5 - 15 bar.

According to a further aspect of the invention, the pressure in said low pressure system is 0,5 - 5 bar (abs), preferably 0,7 - 4 bar and more preferably 1 - 3 bar and the temperature is 60-145°C, preferably 80-130°C
5 and more preferably 90-120°C.

Yet a further aspect of the invention is that a liquid phase is formed in said level tank, which liquid is conveyed to said transfer circulation of the high pressure system in order to be further conveyed to the
10 digester.

Another advantage of the method is that flashing with resulting bangs in the high pressure feeder can be avoided without the need of energy degrading cooling by cold water.

15 An advantage of the method according to the invention is that the live steam consumption can be reduced which results in an improved heat economy.

Another advantage is increased dryness of spent black liquor.

20 Another advantage is that less equipment is needed when performing the same process as in conventional systems.

Detailed description:

25 The invention will be explained in greater detail hereinafter with reference to the drawing which is a diagrammatic representation of a preferred flow sheet for continuous pretreatment of fibrous material in accordance with the present invention.

30 In the drawing, the reference number (1) denotes a chip bin which may be atmospheric or operating at a minor overpressure. The wood chips are fed into the top of the chip bin and are treated therein in a gas phase with steam in order to heat the chips and to drive out
35 gas from their internal cavities. After this treatment

the chips are fed via a low pressure feeder (2) to a low pressure system which optionally comprises a steaming vessel (not shown) followed by a chip chute (3). In the chip chute the chips leave the gas phase part and enters a liquid phase part of the system. At the lower end of the chip chute there is arranged a pressure sluice, a so called high pressure feeder (4), by aid of which the chips are introduced into a high pressure system. From the high pressure feeder (4) there is also an outgoing line (5) that establishes a liquid phase low pressure circulation together with a pump (6), a sand trap (7), a tubular strainer which hereinafter is called an inline drainer (8) and a level tank (9). The low pressure liquor in line (5) is fed by the pump (6) into the sand trap (7), where sand is separated from the liquor, and further through the inline drainer (8) back into the chip chute (3). From the inline drainer there is also an outgoing line (10, 10B) via a valve (10D) to the level tank (9). The object of the level tank is conventionally only to act as a pressure balancing apparatus against said gas phase part of the low pressure system, so that a liquor level between said gas phase part and said liquid phase part can be controlled and a liquid flow from said low pressure circulation can be stabilised. In the present invention, the level tank however also acts as a flash tank. Hot, preferably uncooled, process liquid (11, 12), which may comprise black liquor, from the high pressure system is led into the level tank, above a liquor level. As a result of the released pressure, the liquid flashes into steam and a colder liquid. The steam is, according to the invention, led in a line (13), optionally together with live low pressure steam, through a valve (13A), to the chip bin (1), where it is used for direct heating of the wood chips. Liquid from the level tank (9) is pumped (14) together with an incoming cold process liquid (18),

which preferably consists of white liquor, to the high pressure system. The high pressure system includes a transfer circulation with a feed line (16), that transfers the chips, together with liquor, to the top of a digester (19). A part of the liquor is separated from the chips at the top of the digester and transferred back to the high pressure feeder through a return line (17). The chips are cooked in the digester in an upper concurrent zone followed by a lower countercurrent zone. An extraction screen section (not shown) is arranged between these zones. Hot black liquor is extracted from this screen section.

In the above described, first embodiment of the invention, the saturation pressure P_s at the temperature in the level tank is approximately the same as the pressure P_1 in the chip bin. The saturation pressure P_{11} (and P_{12}) at the temperature of the hot process liquid (11, 12) is, however substantially higher than P_1 and P_s . For this reason, the hot process liquid flashes into the level tank (9). The saturation pressure P_8 at the temperature in the inline drainer is also higher than P_s , which results in a flashing and cooling also of the liquid that is led into the level tank via the line (10B) that mouths above the liquid level in the level tank.

In a second embodiment, which does not include flashing of the hot process liquid, it is merely the liquid from the inline drainer (8) that is led into the level tank via the line (10B) that mouths above the liquid level in the level tank. This embodiment provides a beneficial way to cool the liquid within the low pressure circulation.

In a third embodiment, the steam from the level tank is led in line (13), through a valve (13B), into the chip chute (3). In this case, there is not an open

connection between the level tank and the chip bin and hence P_9 is higher than P_1 but still lower than P_{11} (P_{12}). P_9 is, however, approximately the same as P_1 and the liquid from the inline drainer is thus led in a line (10, 10A) through a valve (10C) into the level tank (9) under the liquid level. No flashing of the liquid from the inline drainer takes place.

The two different embodiments can suitably be implemented in a manner so that either alternative can be operated in the same mill. If the first or second mentioned embodiments are wished, the valves (13A) and (10D) are open and (13B) and (10D) are closed. If the third embodiment is wished, the valves (13B) and (10D) are open and (13A) and (10D) are closed.

The invention is not delimited by the above mentioned description and embodiments, but can be varied within the scope of the claims. The skilled man will for instance realise that the same effect can be achieved by flashing into another vessel within the low pressure system. Also, the steam from the flashing can be led to condensers instead of the chip bin. Moreover, the combination of the possibilities to open or shut the valves are numerous. Although the drawing shows a certain type of equipment in the low and high pressure systems, it is of course possible to implement the invention in both older and newer systems. There can, for instance, be an impregnation vessel before the digester, in which case the chips are transferred from the high pressure feeder to the impregnation vessel and subsequently to the digester.

Patent Claims

1. A method in connection with the pretreatment of comminuted fibrous material intended for chemical
5 cellulose pulp production, wherein said comminuted fibrous material is fed through a low pressure system comprising a gas phase part followed by a liquid phase part, said liquid phase part including a low pressure circulation where a circulating liquid is withdrawn from
10 said fibrous material and is recirculated back to said fibrous material in an upstream position, said fibrous material is sluiced (4) into a high pressure system comprising a liquid phase transfer part operatively connected to a digester (19),
15 characterised in that hot process liquid (11, 12), from said high pressure system, and/or said circulating liquid (10) is evaporatively cooled by being allowed to flash within said low pressure system.
- 20 2. The method as claimed in patent claim 1, wherein said low pressure circulation comprises a level tank (9) for pressure balancing against said gas phase part of the low pressure system, so that a liquor level between said gas phase part and said liquid phase part
25 can be controlled and a liquid flow (15) from said low pressure circulation can be stabilised,
characterised in that said hot process liquid (11, 12) and/or said circulating liquid (10) is allowed to flash into said level tank (9).
- 30 3. The method as claimed in patent claim 1 or 2, characterised in that steam is produced by said flashing and that it is used for direct heating of said fibrous material.

4. The method as claimed in any one of the preceding patent claims,
c h a r a c t e r i s e d i n that said circulating liquid (10), that is flashed, originates from an inline
5 drainer (8).

5. The method as claimed in any one of the preceding patent claims,
c h a r a c t e r i s e d i n that said hot process
10 liquid (11, 12) comprises black liquor.

6. The method as claimed in any one of the preceding patent claims,
c h a r a c t e r i s e d i n that said hot process
15 liquid (11, 12) has a temperature of 100-180°C, preferably 110-170°C and more preferably 120-160°C.

7. The method as claimed in any one of the preceding patent claims,
20 c h a r a c t e r i s e d i n that the pressure of said hot process liquid (11, 12) is 3 - 25 bar, preferably 4 - 20 bar and more preferably 5 - 15 bar.

8. The method as claimed in any one of the preceding
25 patent claims,
c h a r a c t e r i s e d i n that the pressure in said low pressure system is 0,5 - 5 bar(abs), preferably 0,7 - 4 bar and more preferably 1 - 3 bar.

30 9. The method as claimed in any one of the preceding patent claims,
c h a r a c t e r i s e d i n that the temperature in said low pressure system is 60-145°C, preferably 80-130°C and more preferably 90-120°C.

10. The method as claimed patent claim 2,
c h a r a c t e r i s e d i n that a liquid phase is
formed in said level tank (9), which liquid is conveyed
(14, 15) to said transfer part (16, 17) of the high
5 pressure system in order to be further conveyed to the
digester.

AMENDED CLAIMS

[received by the International Bureau on 18 March 1998 (18.03.98);
original claim 1 amended; remaining claims unchanged (2 pages)]

1. A method in connection with the pretreatment of
comminuted fibrous material intended for chemical
5 cellulose pulp production, wherein said comminuted
fibrous material is fed through a low pressure system
comprising a gas phase part followed by a liquid phase
part, said liquid phase part including a low pressure
circulation where a circulating liquid is withdrawn from
10 said fibrous material and is recirculated back to said
fibrous material in an upstream position, said fibrous
material is sluiced (4) into a high pressure system
comprising a liquid phase transfer part operatively
connected to a digester (19),
15 c h a r a c t e r i s e d i n that hot process liquid
(11, 12), from said high pressure system, is
evaporatively cooled by being allowed to flash within
said low pressure system.

20 2. The method as claimed in patent claim 1,
wherein said low pressure circulation comprises a level
tank (9) for pressure balancing against said gas phase
part of the low pressure system, so that a liquor level
between said gas phase part and said liquid phase part
25 can be controlled and a liquid flow (15) from said low
pressure circulation can be stabilised,
c h a r a c t e r i s e d i n that said hot process
liquid (11, 12) and/or said circulating liquid (10) is
allowed to flash into said level tank (9).

30

3. The method as claimed in patent claim 1 or 2,
c h a r a c t e r i s e d i n that steam is produced by
said flashing and that it is used for direct heating of
said fibrous material.

35

4. The method as claimed in any one of the preceding patent claims,
c h a r a c t e r i s e d i n that said circulating liquid (10), that is flashed, originates from an inline
5 drainer (8).

5. The method as claimed in any one of the preceding patent claims,
c h a r a c t e r i s e d i n that said hot process
10 liquid (11, 12) comprises black liquor.


6. The method as claimed in any one of the preceding patent claims,
c h a r a c t e r i s e d i n that said hot process
15 liquid (11, 12) has a temperature of 100-180°C, preferably 110-170°C and more preferably 120-160°C.

7. The method as claimed in any one of the preceding patent claims,
20 c h a r a c t e r i s e d i n that the pressure of said hot process liquid (11, 12) is 3 - 25 bar, preferably 4 - 20 bar and more preferably 5 - 15 bar.

8. The method as claimed in any one of the preceding
25 patent claims,
c h a r a c t e r i s e d i n that the pressure in said low pressure system is 0,5 - 5 bar(abs), preferably 0,7 - 4 bar and more preferably 1 - 3 bar.

30 9. The method as claimed in any one of the preceding patent claims,
c h a r a c t e r i s e d i n that the temperature in said low pressure system is 60-145°C, preferably 80-130°C and more preferably 90-120°C.

35

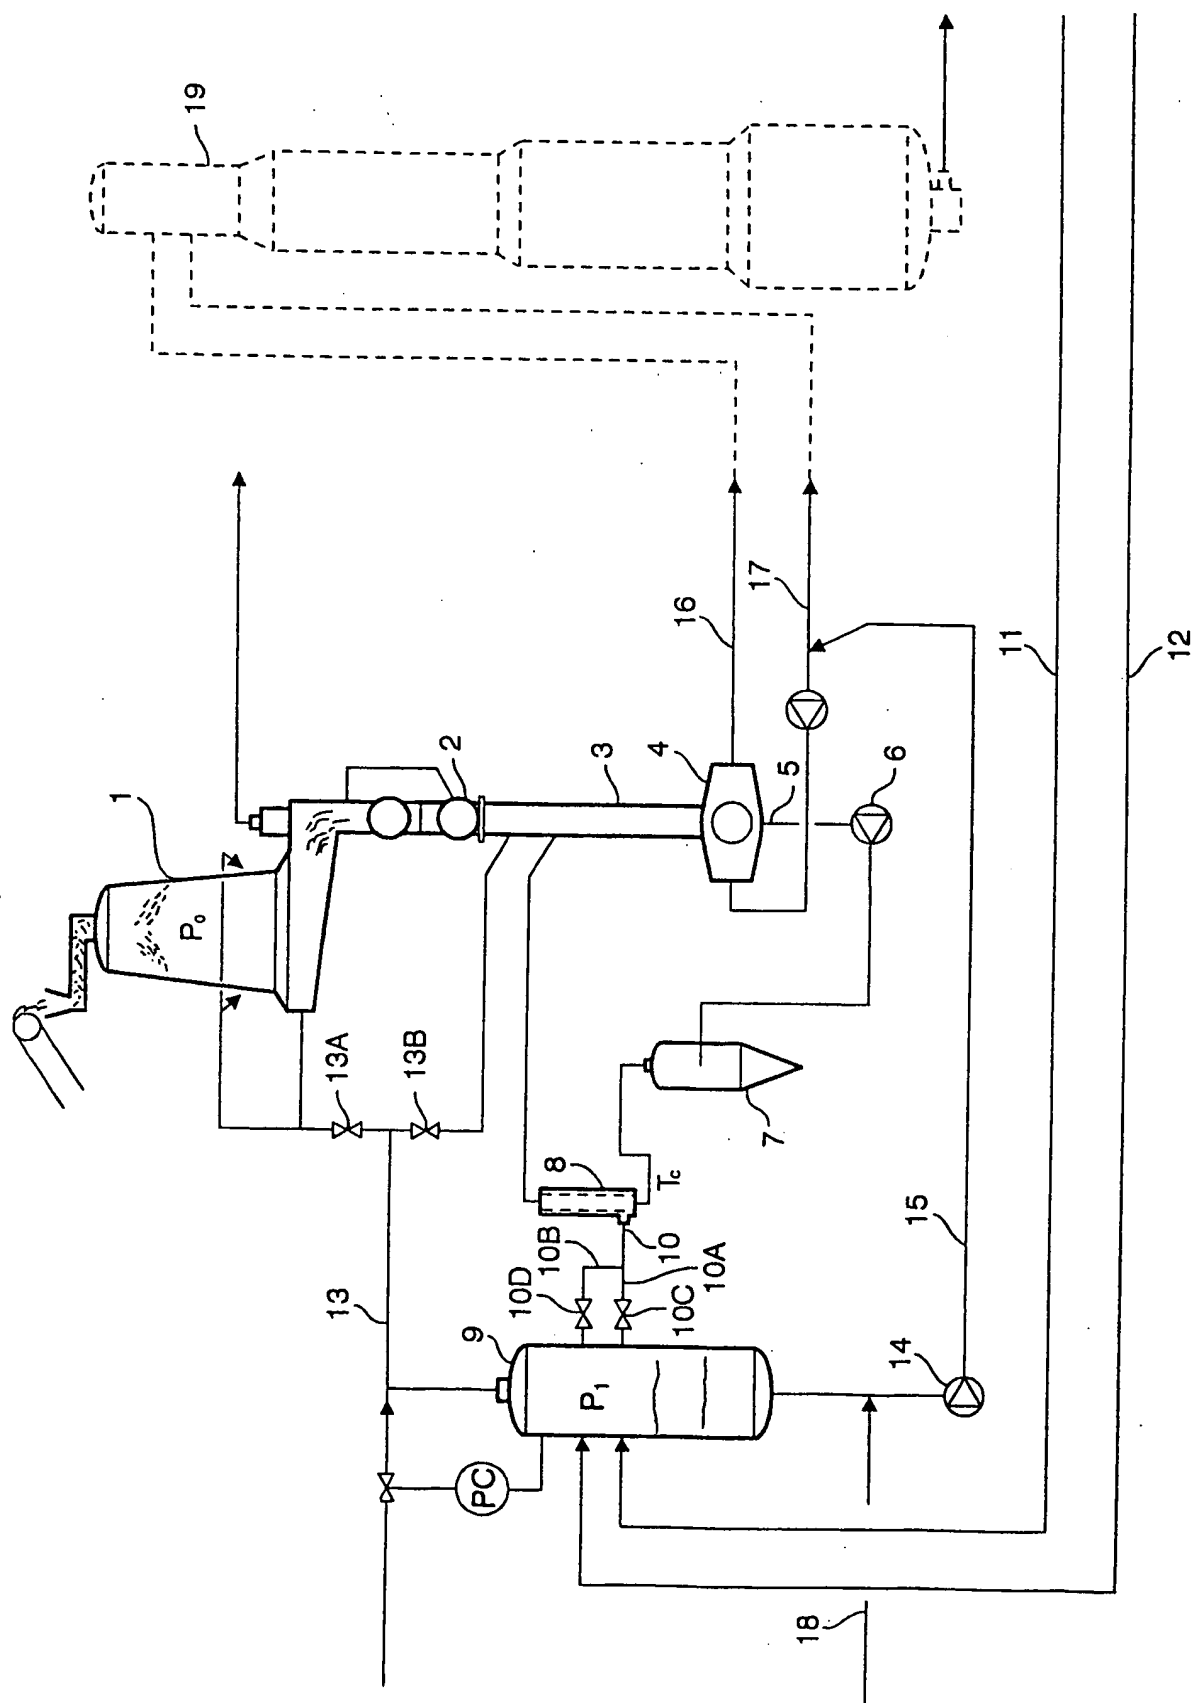

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/01135

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: D21C 3/24, D21C 7/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: D21C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PATFULL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9534712 A1 (KAMYR, INC.), 21 December 1995 (21.12.95), page 3, line 13 - line 19; page 5, line 7 - line 13; page 6, line 29 - line 30, page 12, line 4 - line 17; page 13, line 5 - line 15, figure 5,8	1-3,8-9
Y	---	1-10
Y	WO 9703243 A1 (KVAERNER PULPING AB), 30 January 1997 (30.01.97), page 5, line 1 - line 3; page 5, line 17 - line 22; page 6, line 31 - line 35, figure 1 -----	1-10

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

3 February 1998

04-02-1998

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Marianne Bratsberg
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

07/01/98

International application No.

PCT/SE 97/01135

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9534712 A1	21/12/95	AU 2606295 A	05/01/96
		CA 2191207 A	21/12/95
		FI 964971 A	14/02/97
		SE 9604621 A	31/01/97
		US 5476572 A	19/12/95
		ZA 9504978 A	21/02/96
WO 9703243 A1	30/01/97	SE 504644 C	24/03/97
		SE 9502573 A	13/01/97